

Build Quality







CE Approval Desk



Strong Backside Protection



Grass catcher For Options










X Techincal Specification

Model	ZTR36	ZTR42	ZTR48	ZTR54
Engine Model	Lc1P90F-1 Single Cylinder	B&S 33S8 Single Cylinder	B&S 40S8 Twin Cylinder	LC2P80F Twin Cylinder
Engine Power	15HP-Electric	19HP-Electric	20HP-Electric	25HP-Electric
Engine Displacement	413CC	540CC	656CC	764CC
Cutting Dimension	36inch	42inch	48inch	54inch
Minimum Cutting Height	1.5inch	1.5inch	1.5inch	1.5inch
Minimum Cutting Height	5inch	5inch	5inch	5inch
Cutting Height Level	8 level	8 level	8 level	8 level
Cutting Blade	3	3	3	3
Blade Guide Pulley	4	4	4	6
Transmission Type	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic	Dual Hydrostatic
Minimum Forward Speed	12mph	12mph	12mph	12mph
Gasoline Fuel Capacity	32L	32L	32L	32L
Headlights	Yes	Yes	Yes	Yes
Roll Bar	No	No	No	Yes
Seal Adjustable	Front And Back	Front And Back	Front And Back	Front And Back
G.W/N.W	320/280kg	355/315kg	385/330kg	420/355kg
Lodaing Qty(20/40GP/40HQ)	18/42/56units	18/42/56units	18/42/56units	12/27/36units





Technical Specifications

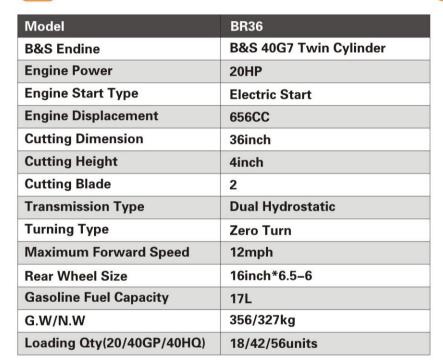



Mower Side View



Front Deck Side



Rear Operation Side



Build Quality



Powerful Engine



Durable Wheel



Steel Strong Construction